


הפניה

ID: KBA01400152

עודכן: 17:34:41 08/10/2016 מוצרים


קשורים: bizhub 224e, bizhub 284e, bizhub 364e, bizhub 454e, bizhub 554e bizhub 654e, bizhub 754e, bizhub C224e, bizhub C284e, bizhub C364e, bizhub C454e, bizhub C554e, bizhub C654e, bizhub C754e Related Options

- אזהרת הפניה: אל תשתמש בכלי האיפוס בסידרה "4e". במקום זאת, השתמש בהליך האיפוס הבא. 1. הקש על מקש [Menu].
2. לגעת [Counter].
3. לגעת במפתחות הבאים בסדר זה; עצור 0 0 0 0 1 0.
4. לגעת במפתחות הבאים בסדר זה; עצור ברור. (ראה הערה "a" להלן).

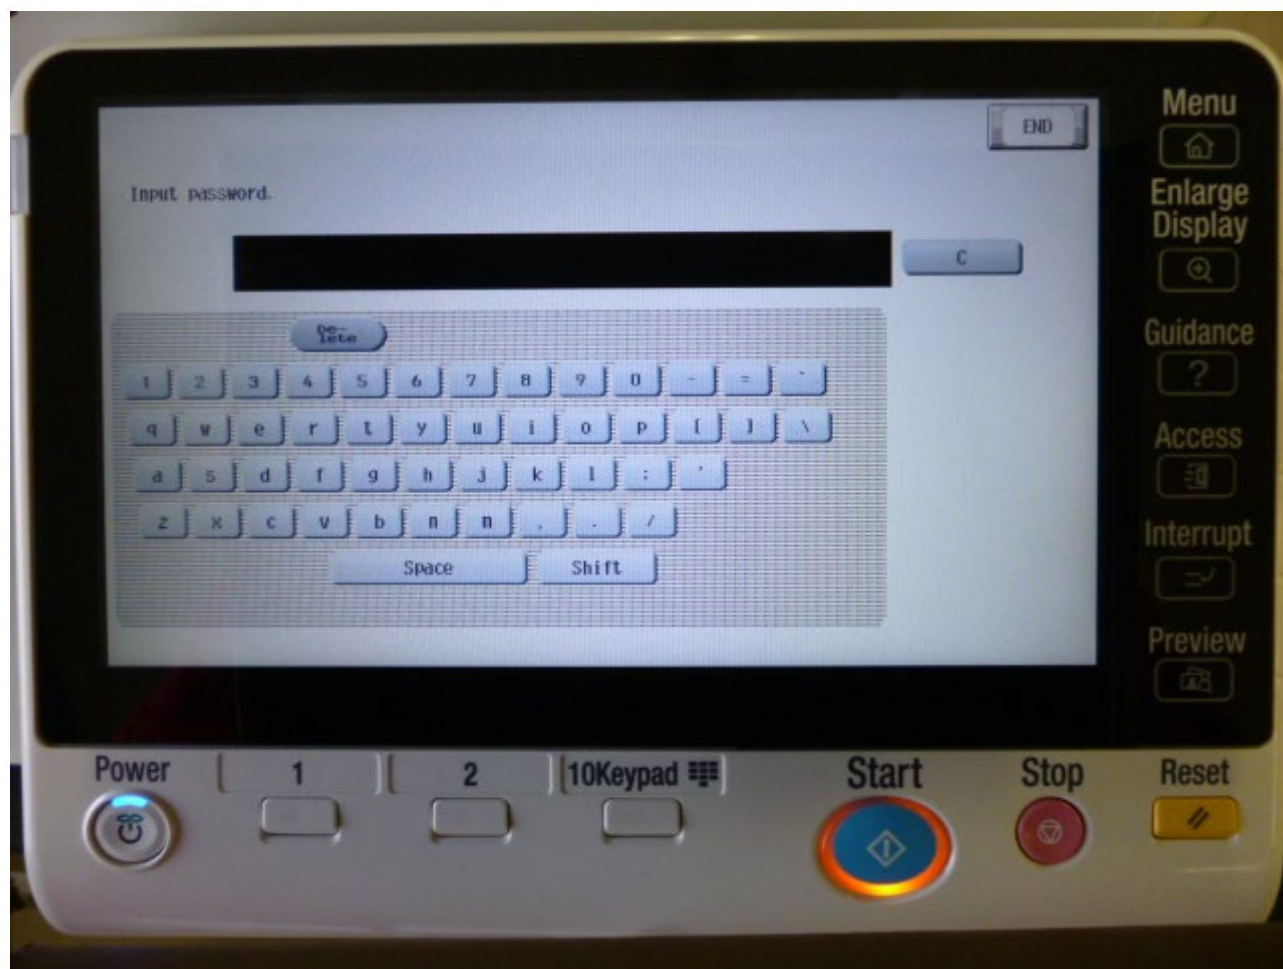


5. שלושה פריטים מוצגים להלן.
מדפסת מספר סידורי
MAC כתובת CE איפוס סימנה
בקשה קוד. (ראה הערה "ב" להלן).

-
-
-

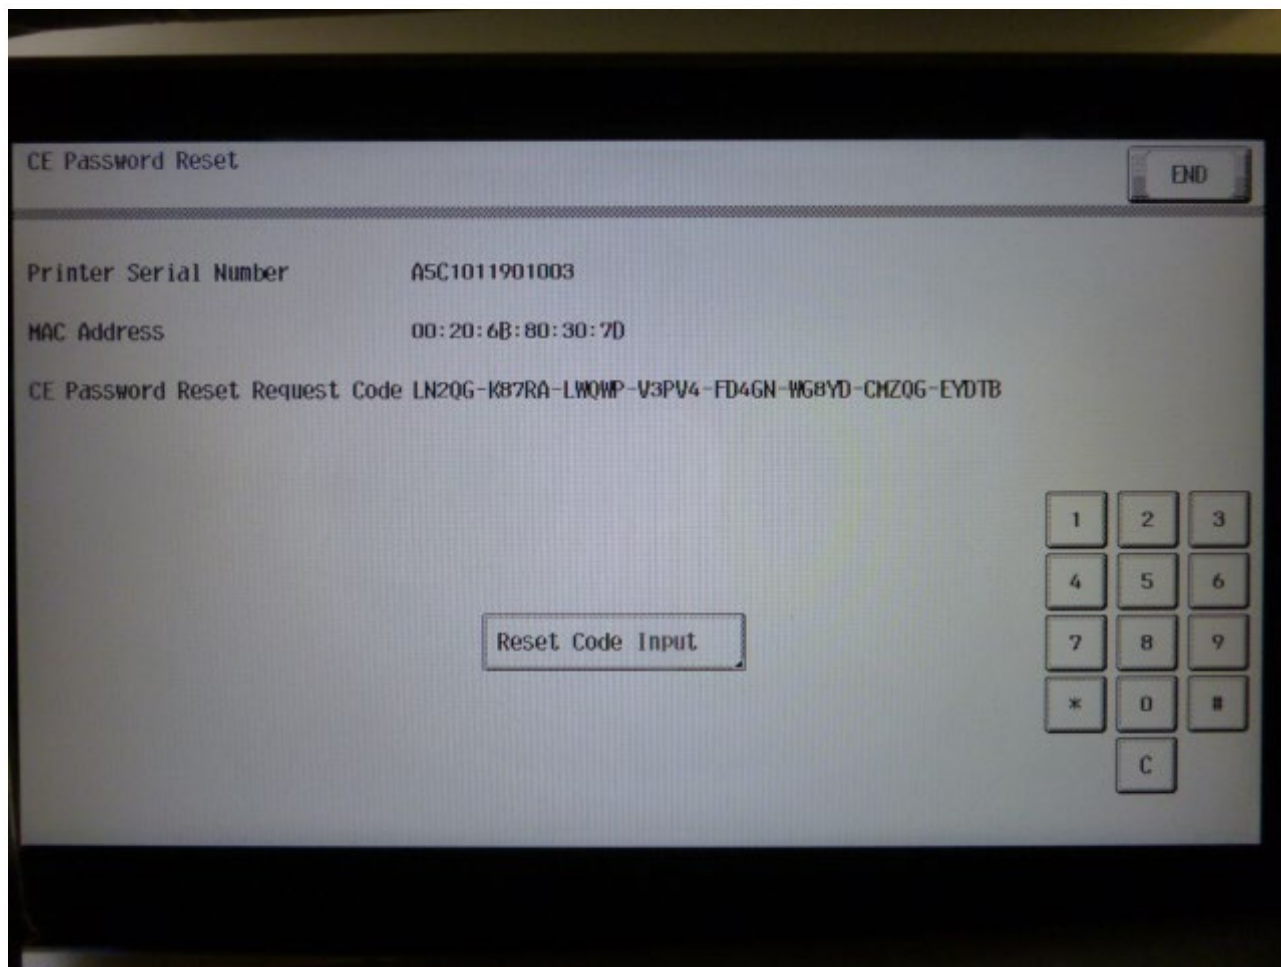


6. גש ל-LMS עבור מנהל באמצעות מחשב המחובר לאינטרנט.

7. לחץ על כניסה.

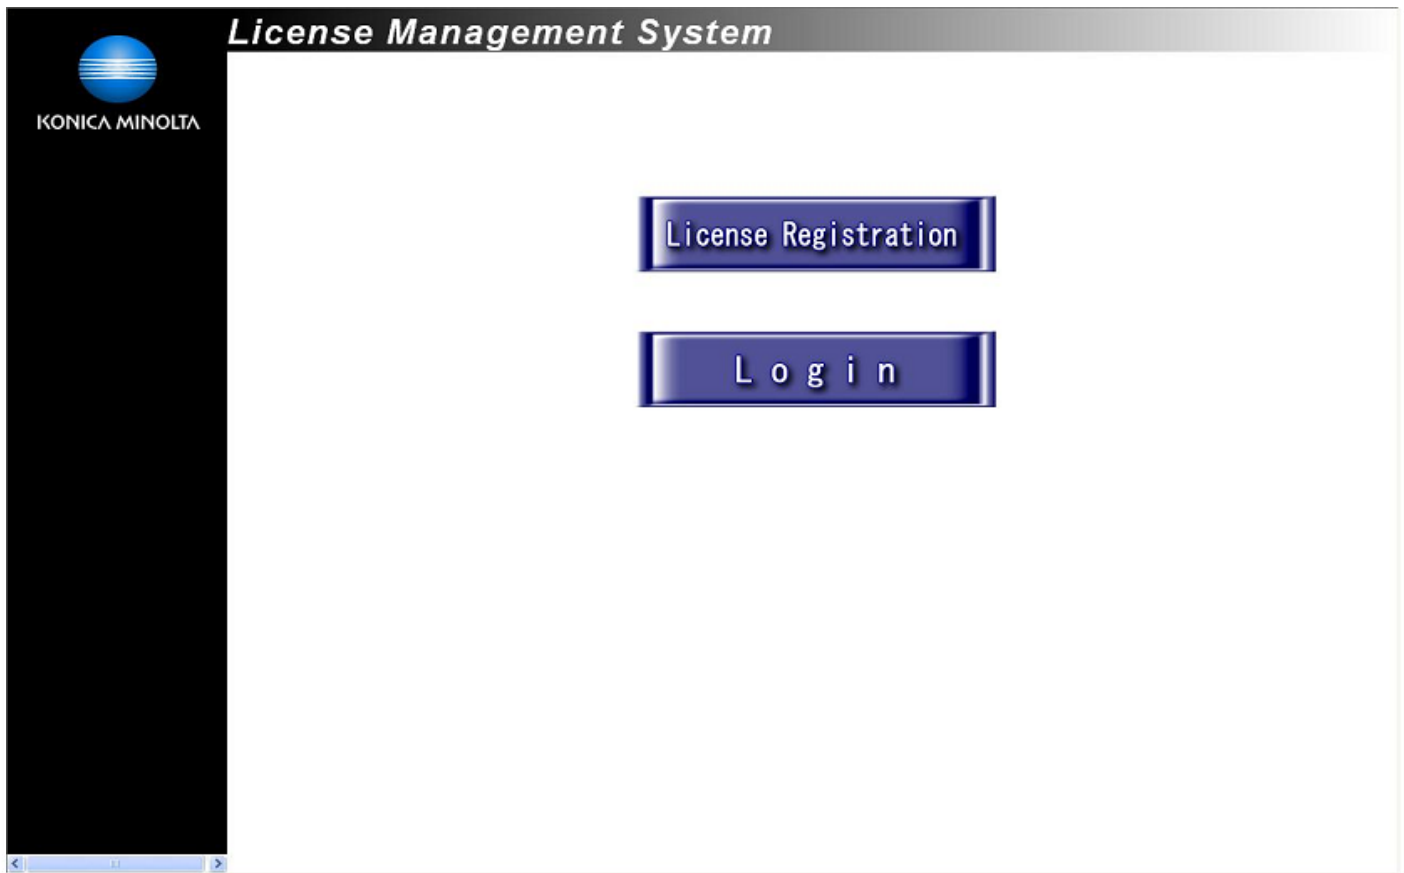

8. לחץ על קוד איפוס בעיה.

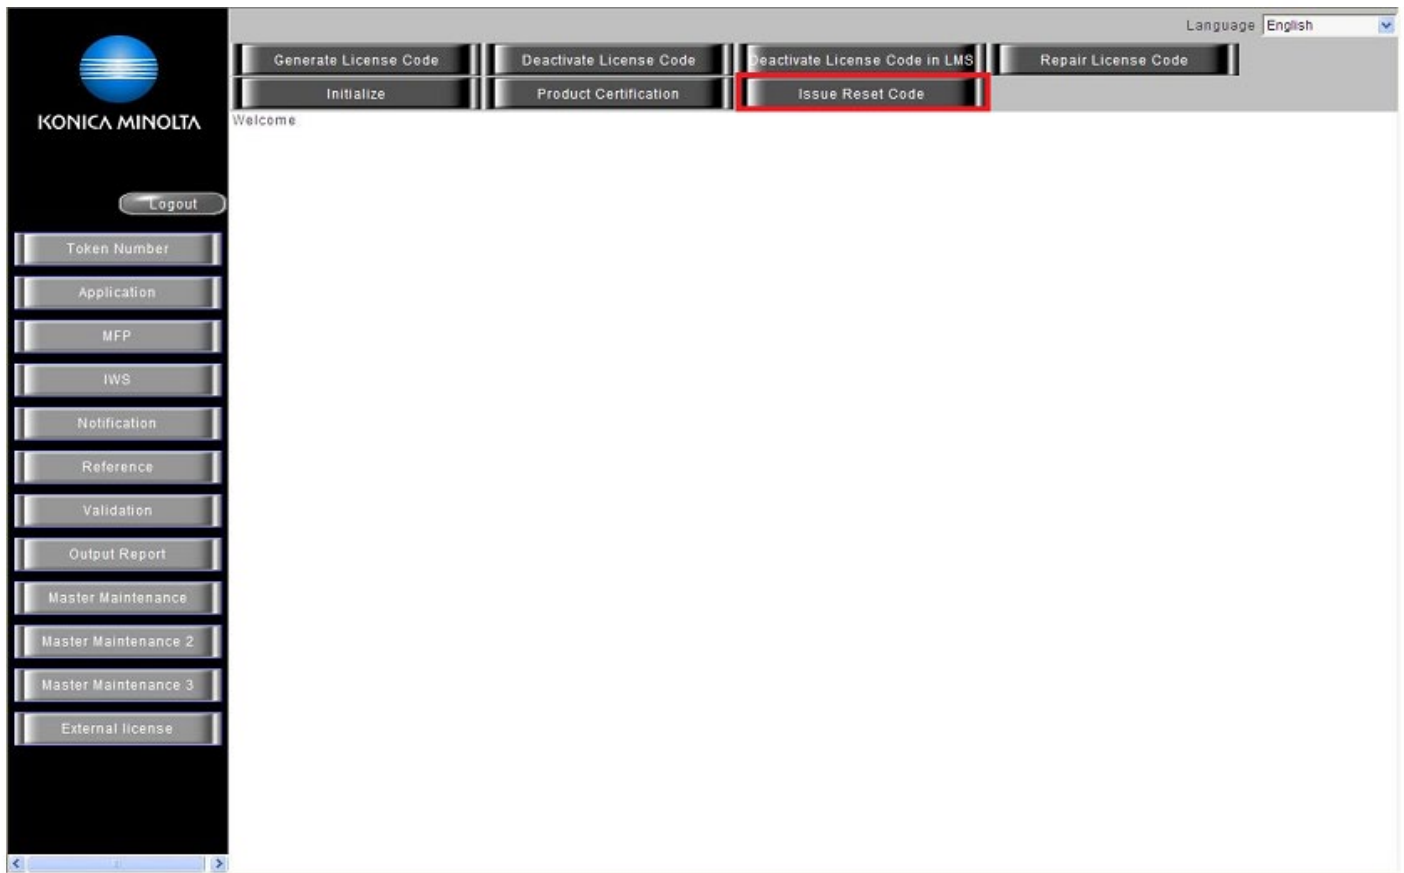

9. הזן מספר סידורי של מדפסת, כתובת MAC וקוד בקשה לאיפוס סימני CE.

The screenshot shows a web application interface for Konica Minolta. At the top, there are navigation buttons: 'Generate License Code', 'Deactivate License Code', 'Deactivate License Code in LMS', 'Repair License Code', 'Initialize', 'Product Certification', and 'Issue Reset Code' (which is highlighted in blue). The language is set to 'English'. Below the navigation is a sidebar with the Konica Minolta logo and a list of menu items: 'Logout', 'Token Number', 'Application', 'MFP', 'IWS', 'Notification', 'Reference', 'Validation', 'Output Report', 'Master Maintenance', 'Master Maintenance 2', 'Master Maintenance 3', and 'External license'. The main content area is titled 'Issue Reset Code' and contains a form with three input fields: 'MFP Serial Number', 'MAC Address', and 'CF Password Reset Request Code'. The 'Request Code' field is a 7-digit code with dashes between digits. Below the form is an 'Issue' button. At the bottom of the main area, it says 'KONICA MINOLTA BUSINESS TECHNOLOGIES, INC. ALL Rights Reserved.'

10. לחץ על בעיה.

11. לחץ על אישור.

Language English

Generate License Code Deactivate License Code Deactivate License Code in LMS Repair License Code

Initialize Product Certification Issue Reset Code

Issue Reset Code

Logout

Token Number

Application

MFP

IWS

Notification

Reference

Validation

Output Report

Master Maintenance

Master Maintenance 2

Master Maintenance 3

External license

MFP Serial Number * A5C1011801003

MAC Address * 00:20:6B:80:30:7D

CE Password Reset Request Code LN2QG - K87RA - LWQWP - I3PV4 - FD4GN - WG8YD - GMZQG - EYDTB

Web

Are you sure you want to register?

OK Cancel

KONICA MINOLTA BUSINESS TECHNOLOGIES, INC. ALL Rights Reserved.

12. LMS מנפיק CE איפוס סיממה קוד.

Language English

Generate License Code Deactivate License Code Deactivate License Code in LMS Repair License Code

Initialize Product Certification Issue Reset Code

Reset Code Complete

The Reset Code process is complete.

MFP_Serial Number A5C1011901003

Reset Code 96TCN-DZ5FJ-R7Y3Q-592A6-WRN8S-GG8YD-CMZQG-EYDTX
96TCNDZ5FJR7Y3Q592A6WRN8S8GG8YDCMZQGEYDTX

Print Go to Main Menu

KONICA MINOLTA BUSINESS TECHNOLOGIES, INC. ALL Rights Reserved.

Logout

Token Number

Application

MFP

IWS

Notification

Reference

Validation

Output Report

Master Maintenance

Master Maintenance 2

Master Maintenance 3

External license

13. לחץ על הדפס.

Language English

Generate License Code Deactivate License Code Deactivate License Code in LMS Repair License Code

Initialize Product Certification Issue Reset Code

Reset Code Complete

The Reset Code process is complete.

MFP Serial Number A5C1011901003

Reset Code
96TCN-DZ5FJ-R7Y3Q-592A6-WRN8S-GG8YD-CMZQG-EYDTX
96TCNDZ5FJR7Y3Q592A6WRN8S8GG8YDCMZQGEYDTX

Print **Go to Main Menu**

KONICA MINOLTA BUSINESS TECHNOLOGIES, INC. ALL Rights Reserved.

Logout

Token Number

Application

MFP

IWS

Notification

Reference

Validation

Output Report


Master Maintenance

Master Maintenance 2


Master Maintenance 3

External license


14. קלט קוד איפוסמגע.

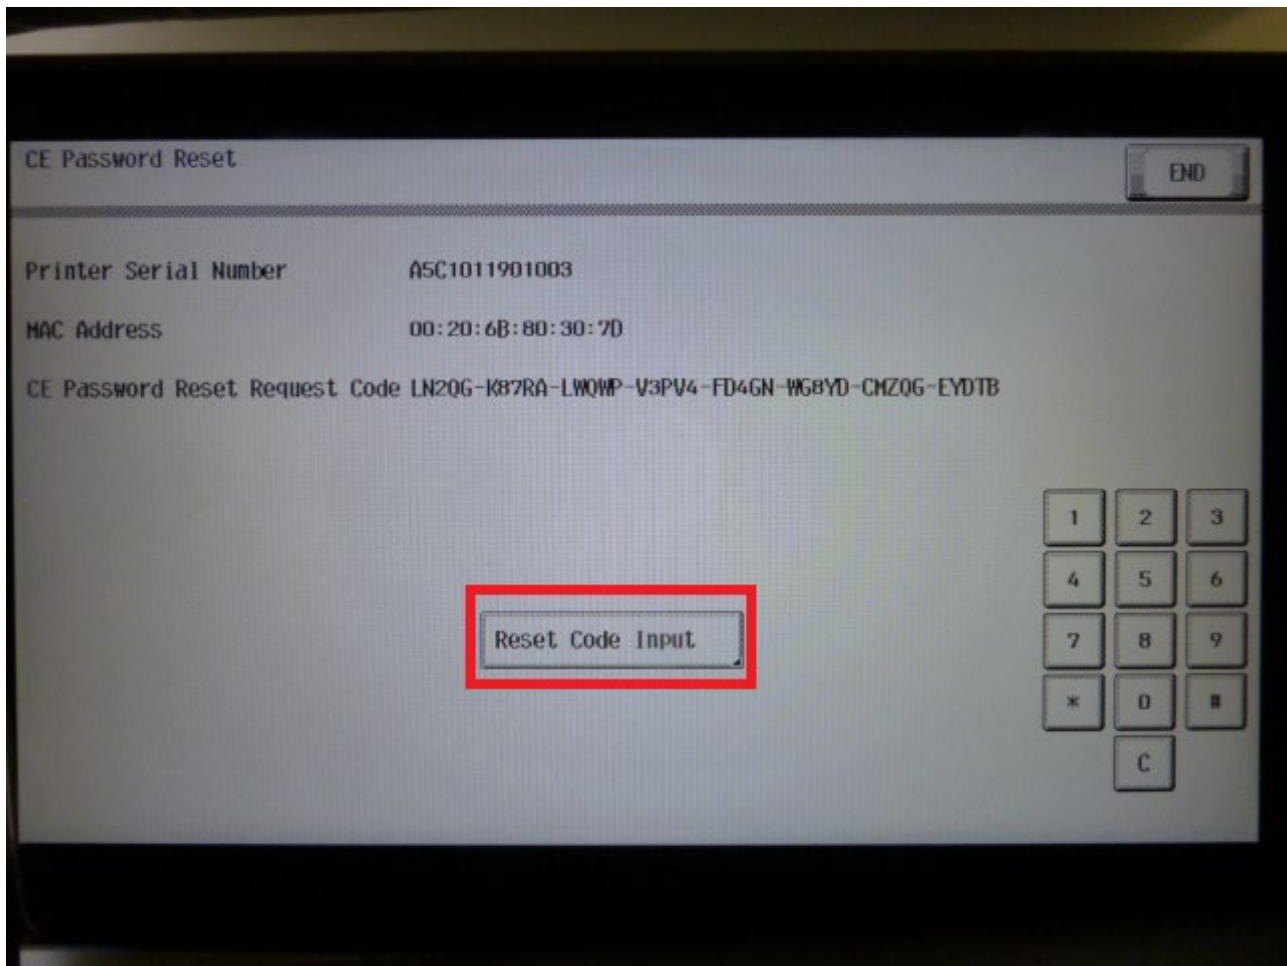

15. הזן קוד לאיפוס סיסמה CE. (ראה הערה "c" להלן).

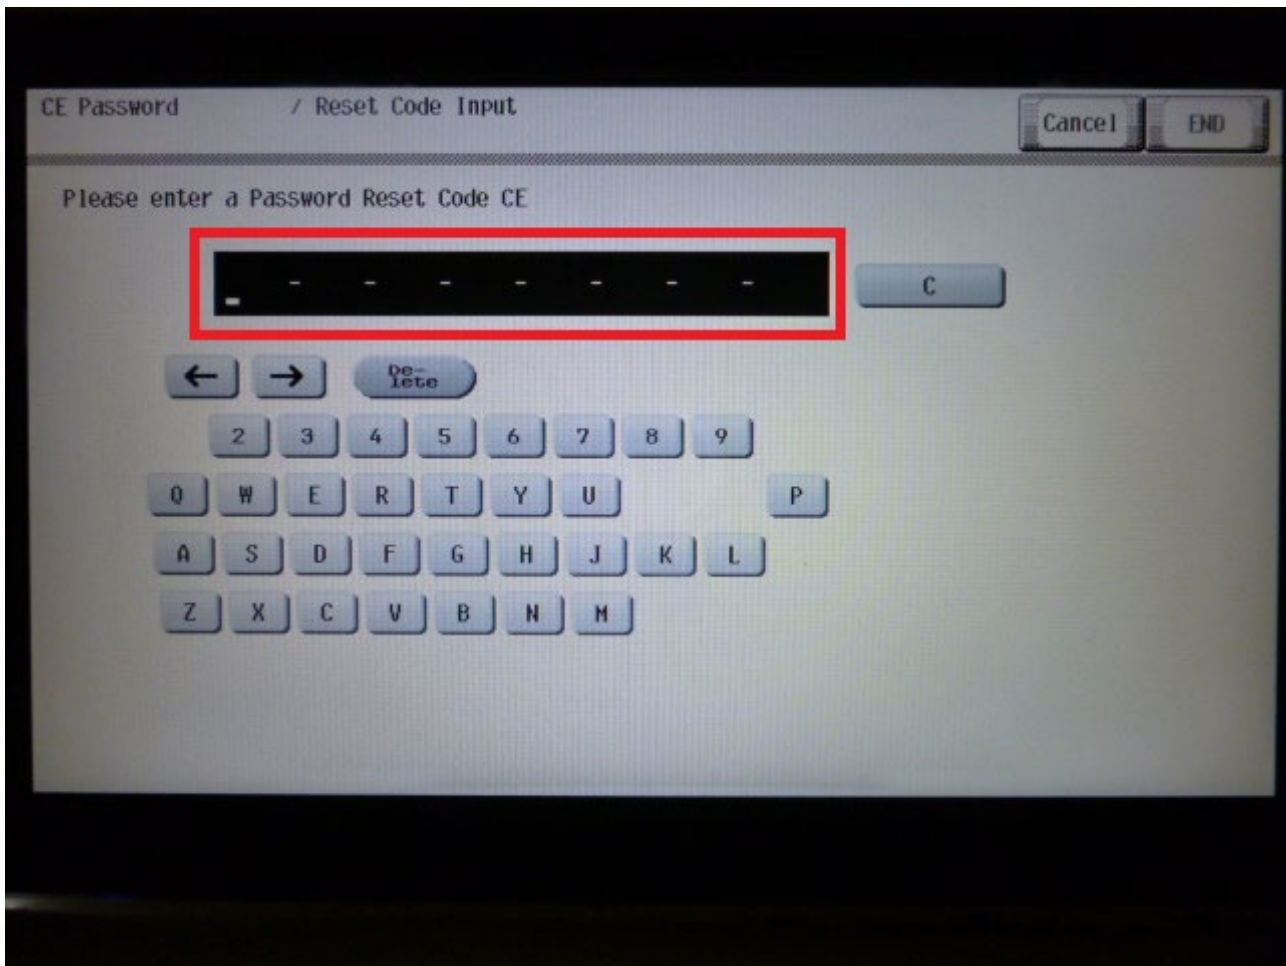

16. סיסמת CE מאופסת לברירת המחדל "9272927292729272", ואם הקוד מוזן כראוי, המחשב יכניס את מצב השירות באופן אוטומטי.

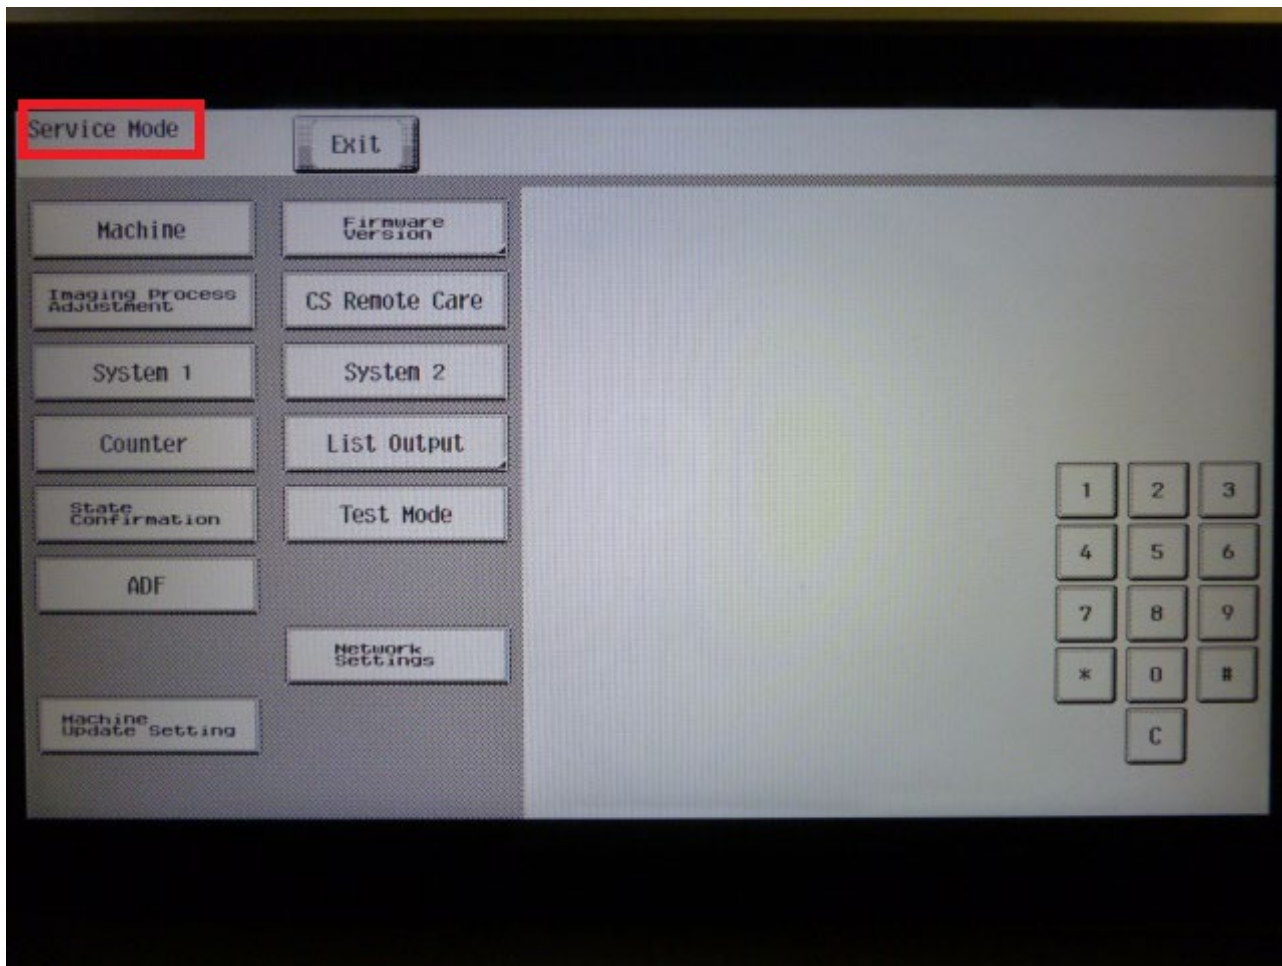

הערות:

- א. מותר לקבל גם במהלך נעילת הגישה.
- ב. הנתונים תקפים לשבעה ימים מיום ההנפקה. יש לבצע ניסיון המשך טיפול מההתארגנות בתנאים הבאים.
 - תוקפם של הנתונים פג או שינוי השעון של המחשב
- ג. אם המספר השגוי מוזן שלוש פעמים, יש לבצע ניסיון המשך טיפול מההתארגנות.